




**F21**

**PVCEXCON 2F/12 W26 U0/V08 FA**

**KB2WH2601**

**TECHNICAL INFORMATION**

	IMPERIAL	METRIC
<b>Max Production Width</b>	118.11in	3000mm
<b>Total Thickness</b>	0.1in	2.6mm
<b>Mass</b>	0.62lb/ft <sup>2</sup>	3kg/m <sup>2</sup>
<b>Tensile force at 1% elongation (static)</b>	68lb/in Internal Method - ref. ISO 21181	12N/mm
<b>Working Temp.</b>	+14/+158F <sup>o</sup>	-10/+70C <sup>o</sup>
<b>Flexion (A)</b>	1.97in 50mm	
<b>Counter Flexion (B)</b>	2.36in 60mm	

**COEFFICIENT OF FRICTION** (bottom side) - **Steel** 0.2

**BEST USED FOR**

**GENERAL CHARACTERISTICS**

2 ply white PVC Food approved, flexible weft

**RECOMMENDED USES**

Slider Bed | Flat Rollers | Channel Trough |  
 Slide Bed with Pressure | Bend Conveyor


**SPECIAL CHARACTERISTICS**

✓ **Food Approved, FDA compliance**  
 acc.to 21 CFR parts 170-19

✓ **Oil & Fat Resistant**

✓ **Food Approved, EU compliance**  
 (EC) No. 1935/2004 & (EU) No. 10/2011

**BELT CONSTRUCTION INFORMATION**

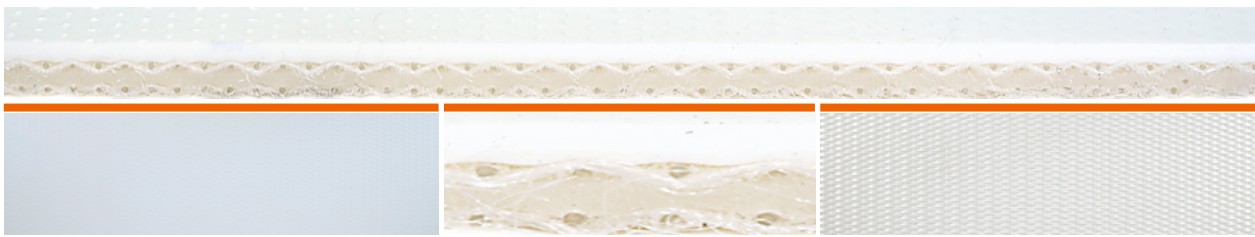

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
<b>Material</b>	PVC	<b>Interply</b>	PVC	<b>Material</b>	Fabric
<b>Color</b>	White (W)	<b>Weft</b>	Flexible (F)	<b>Color</b>	Fabric (FA)
<b>Thickness</b>	0.03in 0.8mm	<b>Plies</b>	2	<b>Thickness</b>	0in 0mm
<b>Hardness</b> ISO 868	72 Shore A	<b>Fabric</b>	Flexible (F)	<b>Hardness</b> ISO 868	-
<b>Surface</b>	Smooth - Shiny (┘)			<b>Surface</b>	PU Impregnated (U0)

\*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019