




G23/R

PVCCON 3R/18 AN95 00/R

KA3AN9501

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	78.74in	2000mm
Total Thickness	0.37in	9.5mm
Mass	1.64lb/ft ²	8kg/m ²
Tensile force at 1% elongation (static)	103lbf/in	18N/mm
	Internal Method - ref. ISO 21181	
Working Temp.	+14/+158F ^o	-10/+70C ^o
Flexion (A)	4.72in 120mm	
Counter Flexion (B)	7.09in 180mm	

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.24

BEST USED FOR

Sanding and calibrating machines for wood products. Paper and cardboard industry. Gypsum board.

GENERAL CHARACTERISTICS


3 ply gray PVC waffle top

RECOMMENDED USES

Slider Bed | Flat Rollers | Incline Conveying | Incline Variation | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

BELT CONSTRUCTION INFORMATION

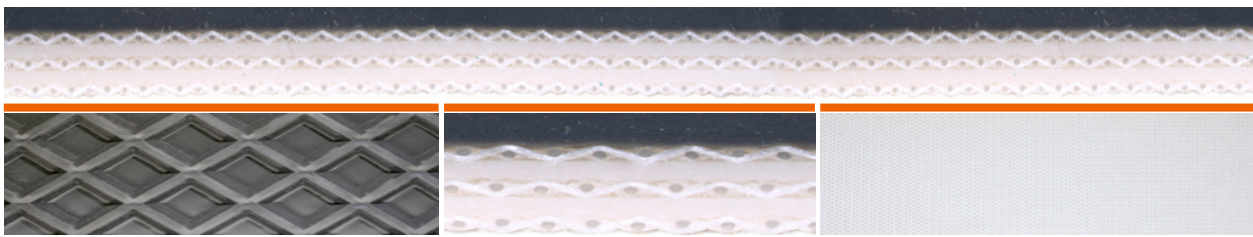

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
Material	PVC	Interply	PVC	Material	Fabric
Color	Anthracite (AN)	Weft	Rigid (R)	Color	Fabric (FA)
Thickness	0.25in 6.3mm	Plies	3	Thickness	0in 0mm
Hardness ISO 868	55 Shore A	Fabric	Rigid (R)	Hardness ISO 868	-
Surface	Rhombus/Waffle Top (R)			Surface	Bare (00)

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019