




L20/BW

PVCCON 2R-RX/14 PG23 00/BW AS

KA2PG2301

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.09in	2.3mm
Mass	0.53lb/ft ²	2.6kg/m ²
Tensile force at 1% elongation (static)	80lb/in Internal Method - ref. ISO 21181	14N/mm
Working Temp.	+14/+158F ^o	-10/+70C ^o
Flexion (A)	1.97in 50mm	
Counter Flexion (B)	3.54in 90mm	

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.24

BEST USED FOR

GENERAL CHARACTERISTICS

2 ply green PVC with basket weave profile on top cover and whisper fabric on the bottom. Antistatic.


RECOMMENDED USES

Slider Bed | Flat Rollers | Incline Conveying | Incline Variation | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
ISO 284 & 21178
- ✓ **Low Noise**

BELT CONSTRUCTION INFORMATION

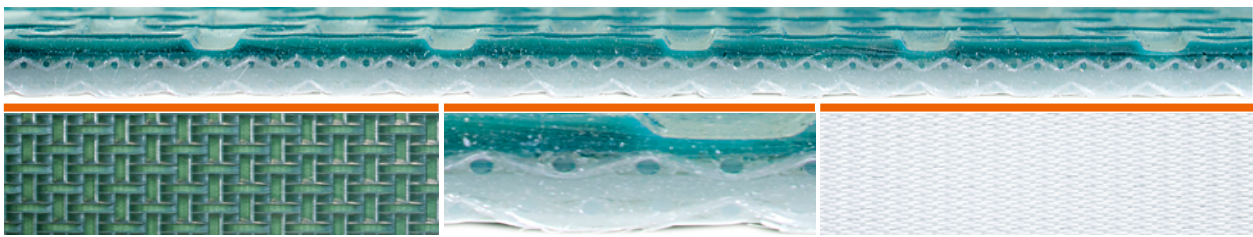

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
Material	PVC	Interply	PVC	Material	Fabric
Color	Petrol Green (PG)	Weft	Rigid (R)	Color	Fabric (FA)
Thickness	0.03in 0.7mm	Plies	2	Thickness	0in 0mm
Hardness ISO 868	55 Shore A	Fabric	Rigid - Rigid Whisper (R-RX)	Hardness ISO 868	-
Surface	Basket Weave (BW)			Surface	Bare (00)

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019