


U14/08.0/AG

PVCCON 2R/12 AG24 00/V08 AS

KA2AG2401

TECHNICAL INFORMATION

| | IMPERIAL | METRIC |
|--|----------------------------------|---|
| Max Production Width | 118.11in | 3000mm |
| Total Thickness | 0.09in | 2.4mm |
| Mass | 0.56lb/ft ² | 2.75kg/m ² |
| Tensile force at 1% elongation (static) | 68lb/in | 12N/mm |
| | Internal Method - ref. ISO 21181 | |
| Working Temp. | +14/+158F ^o | -10/+70C ^o |
| Flexion (A) | 1.97in 50mm |  |
| Counter Flexion (B) | 2.76in 70mm | |

COEFFICIENT OF FRICTION (bottom side) - **Steel** 0.24

BEST USED FOR

GENERAL CHARACTERISTICS

2 ply apple green PVC antistatic


RECOMMENDED USES

Slider Bed | Flat Rollers | Slide Bed with Pressure

SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
 ISO 284 & 21178

BELT CONSTRUCTION INFORMATION

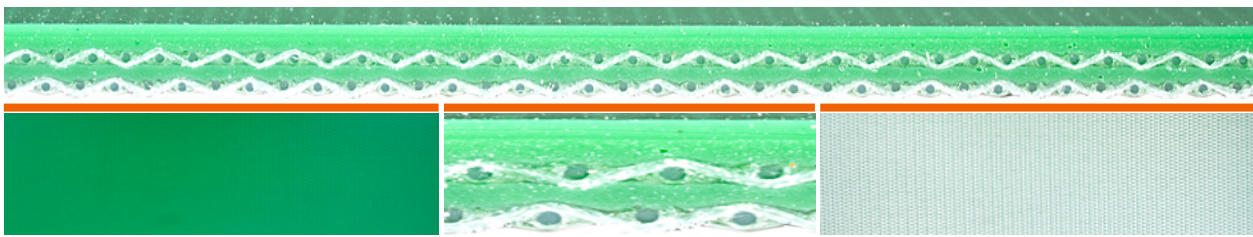

| TOP SIDE (Carrying) | | TENSION MEMBER | | BOTTOM SIDE (Pulley) | |
|----------------------------|--------------------|-----------------|-----------|----------------------------|-------------|
| Material | PVC | Interply | PVC | Material | Fabric |
| Color | Apple Green (AG) | Weft | Rigid (R) | Color | Fabric (FA) |
| Thickness | 0.03in 0.8mm | Plies | 2 | Thickness | 0in 0mm |
| Hardness ISO 868 | 74 Shore A | Fabric | Rigid (R) | Hardness ISO 868 | - |
| Surface | Smooth - Shiny (L) | | | Surface | Bare (00) |

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019