


U21

PVCCON 2F/12 PG26 00/V08 AS

KA2PG2601

**TECHNICAL INFORMATION**

	IMPERIAL	METRIC
<b>Max Production Width</b>	118.11in	3000mm
<b>Total Thickness</b>	0.1in	2.6mm
<b>Mass</b>	0.62lb/ft <sup>2</sup>	3kg/m <sup>2</sup>
<b>Tensile force at 1% elongation (static)</b>	68lb/in Internal Method - ref. ISO 21181	12N/mm
<b>Working Temp.</b>	+14/+158F <sup>o</sup>	-10/+70C <sup>o</sup>
<b>Flexion (A)</b>	1.97in 50mm	
<b>Counter Flexion (B)</b>	2.36in 60mm	

**COEFFICIENT OF FRICTION** (bottom side) - **Steel** 0.24

**BEST USED FOR**

**GENERAL CHARACTERISTICS**

2 ply green PVC flexible weft. Antistatic


**RECOMMENDED USES**

Slider Bed | Flat Rollers | Channel Trough | Slide Bed with Pressure | Bend Conveyor

**SPECIAL CHARACTERISTICS**

- ✓ **Antistatic**  
ISO 284 & 21178

**BELT CONSTRUCTION INFORMATION**

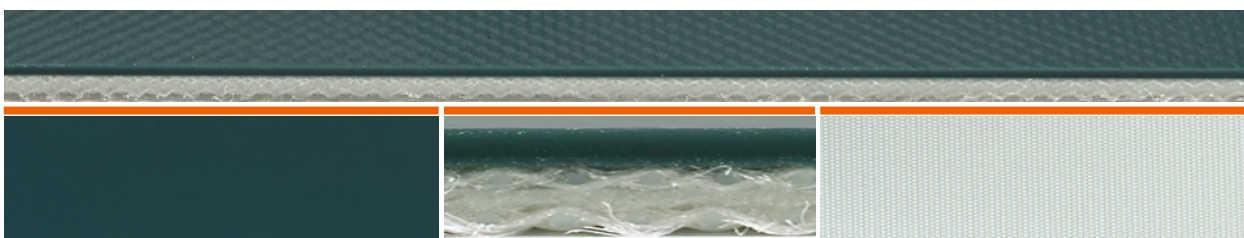

TOP SIDE (Carrying)		TENSION MEMBER		BOTTOM SIDE (Pulley)	
<b>Material</b>	PVC	<b>Interply</b>	PVC	<b>Material</b>	Fabric
<b>Color</b>	Petrol Green (PG)	<b>Weft</b>	Flexible (F)	<b>Color</b>	Fabric (FA)
<b>Thickness</b>	0.03in 0.8mm	<b>Plies</b>	2	<b>Thickness</b>	0in 0mm
<b>Hardness</b> ISO 868	74 Shore A	<b>Fabric</b>	Flexible (F)	<b>Hardness</b> ISO 868	-
<b>Surface</b>	Smooth - Shiny (L)			<b>Surface</b>	Bare (00)

\*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019